



Bardon - European Oak Coastal

ENGINEERED EUROPEAN OAK FLOORING

EUROPEAN OAK

DESCRIPTION

As part of Big River Group's premium, durable, stable flooring solutions, European Oak is a classic timber species offering character and individual richness to complement a range of contemporary finishes. Through a diverse colour palette European Oak highlights and embraces the natural characteristics of solid timber for a truly unique finish.

SPECIES

ASH - 206529



BLONDE - 206532




COASTAL - 206531



DESERT - 206530



MOCHA - 206534

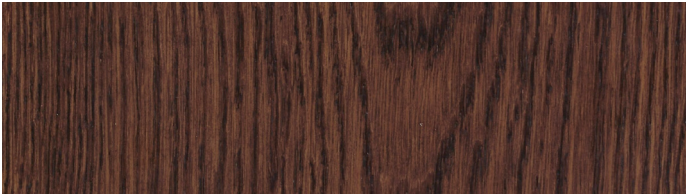


NATURAL - 205419



RAW - 205420



TAN - 206533

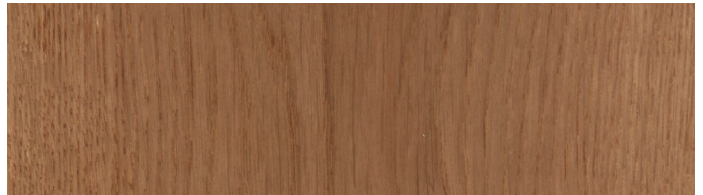

This sample to be used as a guide only. Note: colour and grain varies between boards.

CERTIFICATION

Both the European Oak lamellas and the Eucalyptus hardwood plywood base are Forest Stewardship Council (FSC) certified.

Interior Air Quality – Green Building Council compliant for VOC & Formaldehyde.

Flammability – CHF 3.4 kW/ m², Smoke Value – 45%.min, Slip Resistance Classification – P3

EMISSIONS

The product exceeds the minimum standard of the World Health Organisation achieving E0.

GRADING

Each board features distinct knots and grain variations to create a unique look. The standard grade consists of a mixture of A, B, C, and D grades with features including knots, tiger stripes and sapwood for a truly unique finish.

PARQUETRY HERRINGBONE

DESCRIPTION

Big River's European Parquetry Herringbone Oak provides timeless sophistication to both classic and contemporary design. Crafted from high-quality hardwoods its elegance and versatility make it a popular flooring choice for both residential and commercial applications.

SPECIES

SIZE - 3/14*150*900 PACK SIZE - 1.08sqm

DESERT - 209949




COASTAL - 209950



BLONDE - 209951



NATURAL - 209948

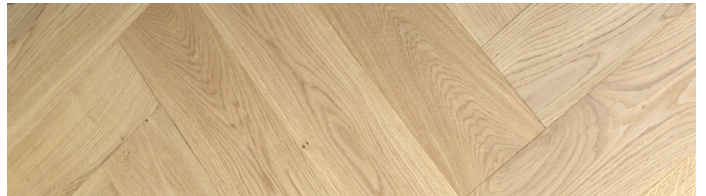

This sample to be used as a guide only. Note: colour and grain varies between boards.

CERTIFICATION

Both the European Oak lamellas and the Eucalyptus hardwood plywood base are Forest Stewardship Council (FSC) certified.

Interior Air Quality – Green Building Council compliant for VOC & Formaldehyde.

Flammability – CHF 3.4 kW/ m², Smoke Value – 45%.min, Slip Resistance Classification – P3

EMISSIONS

The product exceeds the minimum standard of the World Health Organisation achieving E0.

GRADING

Each board features distinct knots and grain variations to create a unique look. The standard grade consists of a mixture of A, B, and C grades with features including knots, tiger stripes and sapwood for a truly unique finish.




Ormiston Grove- Euro Oak Blonde

The Promenade - Euro Oak Coastal

JANKA HARDNESS

This is the industry standard to evaluate the hardness of the timber this is done by a metal ball 11.28mm diameter being embedded ½ way into the timber sample resulting in a measurement of force, the measurement that Big River refers to is kilonewtons (kN)

The coating does not increase the hardness of the timber though it contributes to the durability against scratching, day to day wear and tear, the differing sheen levels will highlight this as well.

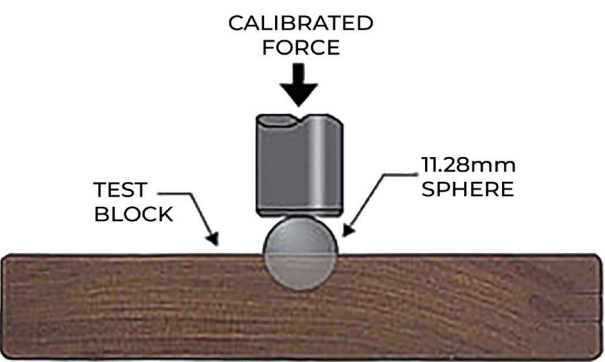

INSTALLATION

When making a major investment in your unique timber floor to ensure the optimum performance of your floor Big River Group recommends the floor to be installed as a direct flooring system this will reduce the amount of movement in the floor, provide more visually appealing expansion options and sound solid under foot when walking on it like traditional solid strip timber flooring. The product can be installed as a floating flooring system though ensure that the T&G is fixed together with a crosslinking PVA adhesive, that the expansion joints are in the appropriate area, each room is compartmentalised. Refer to Big Rivers installation guidelines or have a qualified flooring contractor undertake the works.

WARRANTY

20 year residential warranty.

CUSTOMER PRODUCT

Big River is able to offer projects in addition to the standard product custom product such as Grade A,B- Wider planks 220, 240 etc, different thicknesses for plank 15, 19, 22 Oak lamella 4, 6mm. If there is a specific colour you require the option to match can be done. Suitable lead time is required to undertake the process.

SPECIFICATIONS	
Type:	Engineered pre-finished
Lamella:	European Oak 3mm
Plywood Base:	Eucalyptus Hardwood
Coating:	7 coats Treffert water-based UV cured polyurethane, 5 sheen level +/-3
Finish:	Matte, brushed
Profile:	T&G, end matched, 4 sides micro-bevelled
Range:	6 stained colours, 1 natural, 1 raw
Certification:	FSC
Grade:	A,B,C,D
Janka Hardness:	5.5 – 6kN
DIMENSIONS	
Product:	3/14×190×1,900 (raw 4/14)
Pack size:	2.888sqm
Rows per pack:	8
Full rows:	6
Nested:	2

